

## DUAL SPIN-ON HEAD 1 1/2" SAE 4-BOLT PORTS WITH 50 PSI BYPASS VALVE

Donaldson Part No: **P574958**

Fluid Compatibility: All diesel fuels & lubricants




Clean Solutions filter heads feature robust, aluminum construction with steel inserts to minimise metal-to-metal bonding, or galling, between the head and the filter, even when used with diesel fuel.


The threaded insert contains an O-ring seal eliminating cross contamination from the unfiltered to clean side of the fitted elements. Viton® seals are compatible with a wide range of fluids and maintain their integrity in cold weather.

A built in bypass valve allows continued flow during cold weather operation or a filter plugging event.

### SPECIFICATIONS

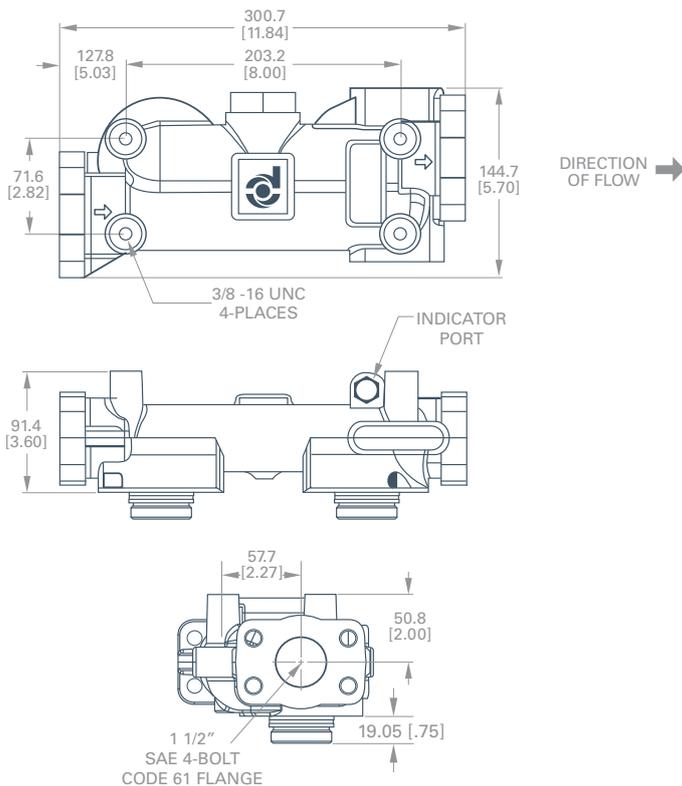

<b>Maximum Flow Range</b>	473 lpm
<b>Working Pressure</b>	350 psi / 2413 kPa / 24.1 bar
<b>Operating Temperature</b>	-40°C to 118°C
<b>Connection</b>	1 1/2" SAE 4-Bolt Code 61 Flange
<b>Bypass Valve</b>	50 psi / 344 kPa / 3.44 bar
<b>Dry Weight</b>	3.54 kg

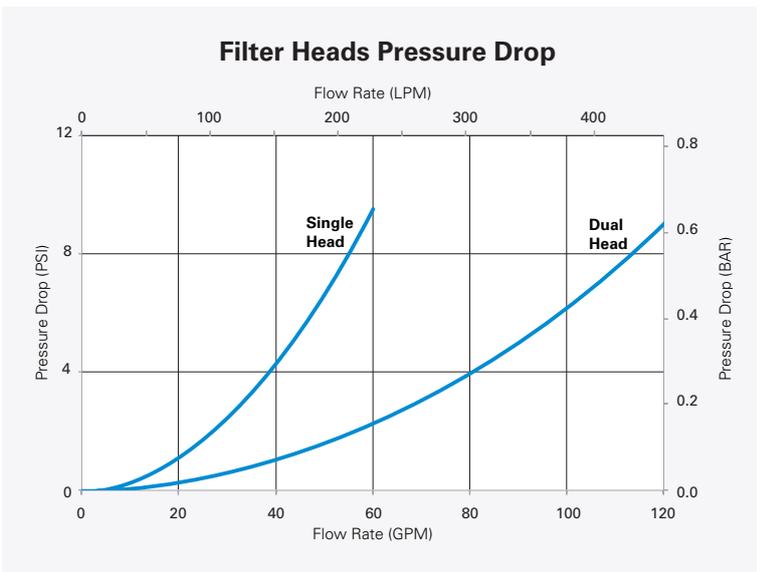

### DESIGNED FOR USE WITH

- 

**Compact Fuel Filter**  
DBB5333
- 

**Compact Fuel Filter**  
DBB7733
- 

**Fuel Filter**  
DBB8666
- 

**Fuel Filter**  
DBB8777
- 

**Light Oil Filter**  
DBB8665
- 

**Heavy Oil Filter**  
DBB8664
- 

**Water Absorbing Filter**  
DBB0248

## ACCESSORIES

### PARTS

<b>4-Bolt Code 61 Flange</b>	P506071 1 1/2" BSPP Adapter 1/4" BSP, 1/4" NPT Ports (plugged), Adapts P568583, P574958 Dual Head to 1 1/2" BSPP
------------------------------	--

<b>Threaded Insert O-rings</b>	P164050 - Replacement O-Rings for heads and manifolds, Viton, not for use on hP
--------------------------------	---

### PRESSURE GAUGES AND SERVICE INDICATORS

<b>Electrical Service Indicator</b>	P174396 - 50 psi / 345 kPa / 3.45 bar, microprocessor compatible
-------------------------------------	--

<b>Upstream Pressure Gauge Adapter</b>	P573682 - For single and dual heads, 1/8" NPT
--	---

<b>Pressure Gauge</b>	P573681 - 0 - 60 psi / 414 kPa / 4.1, 1/8" NPT, centre back mount, 1 1/2" diameter, use with P573682 adapter
-----------------------	--

### SAMPLING TOOLS

<b>Test Point</b>	P563224 - For use with P573414 and P573415 adapters SAE-4 to M16 x 2
-------------------	--

<b>Test Point</b>	P563215 - For dual heads, 1/4 BSPP to M16 x 2, use with P506071 flange
-------------------	--

<b>Test Point Hose Assembly</b>	P563255 - 1220mm 1620 series M16 x 2 thread, for use with P563215, P563224 mini mess test points
---------------------------------	--

