



Donaldson Part No: **DFF0078**

Fluid Compatibility: Safe for use with all diesel fuels and lubricants

The Thermally Reactive Advanced Protection (T.R.A.P.) Breather assembly protects the fluids in your storage tanks from airborne particulate contamination and ambient moisture.

It combines a high capacity 3 micron air filter with a deliquescent breather that regenerates itself when air is expelled from the tank. The self-regenerating moisture blocking capability of T.R.A.P. enables extended life and functionality.


Bulk tank breather assembly includes:

- Breather
- Restriction indicator port 1/8" NPT
- 2.32 PSI/15 kPa relief valve
- Brass fittings with a 1 1/2" BSP Socket

SPECIFICATIONS

Assembly Height:	350 mm
Max Width:	230 mm
Efficiency:	97% efficient @ 3 micron
Maximum Flow Range	500 lpm
Operating Temperature	-40 to 93°C
Connection:	1 1/2" BSP
Indicator Port	1/8" NPT

Replacement Breather Element: **P923075**

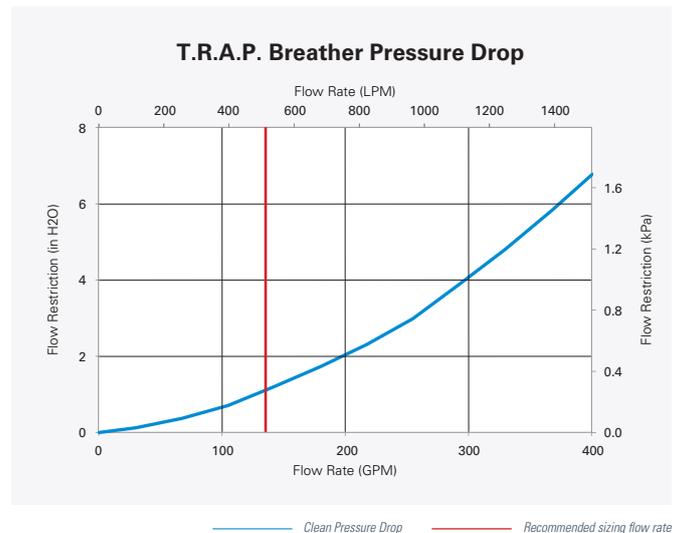

APPLICATIONS

- For use with all diesel fuels and lubricants
- Above and below ground tanks
- Mobile service trucks
- Indoor and outdoor applications
- High flow and large capacity tanks (may require multiple breather units)
- Establish the safe working pressure and vacuum values of your tank before calculating breather requirements