



Donaldson Part No: **DFF1012**

Fluid Compatibility: All diesel fuels and lubricants

Filter Quantity: up to 12 (sold separately)



Blanking caps: up to 6 (sold separately) DFF1005

Clean Solutions Filter Manifolds increase flow rates beyond the capability of a single or dual filter head.


Multiple manifolds may be plumbed together in parallel flow to increase contaminant holding capacity or to clean fluids at high flow rates.

DFF1012 can utilise blanking caps on one or two sides for installation in tight locations, or for mounting against bulk heads.

SPECIFICATIONS

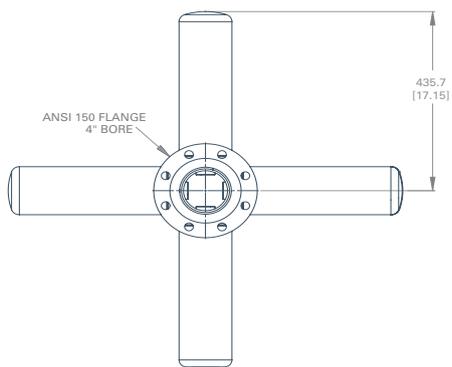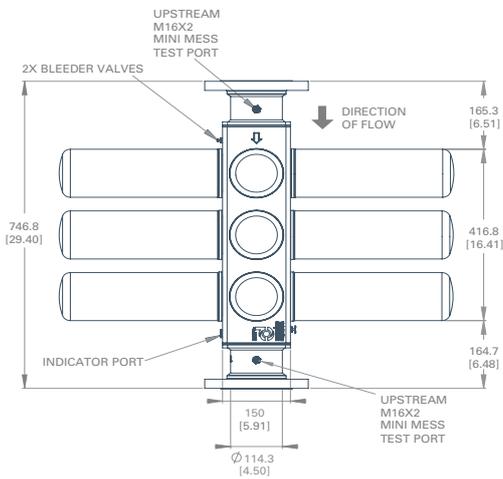

| | |
|------------------------------|---|
| Maximum Flow Range | 2650 lpm |
| Working Pressure | 152 psi / 1050 kPa / 10.5 bar |
| Operating Temperature | -40°C to 118°C |
| Mounting Connection | 4" ANSI 150 Flange |
| Pressure Gauges | Accessories sold separately |
| Sampling | Includes up-stream and down-stream mini-mess sampling ports with M16 x 2 thread |
| Dry Weight | 58 kg |

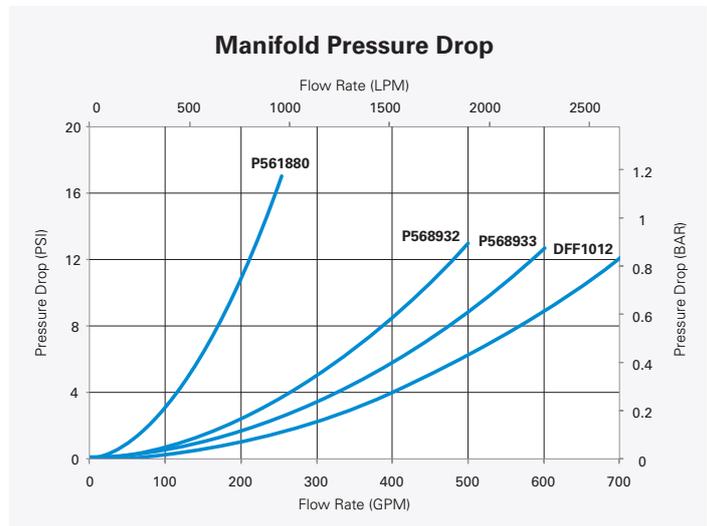

DESIGNED FOR USE WITH



Fuel Filter

DBB8666



Fuel Filter

DBB8777



Light Oil Filter

DBB8665



Heavy Oil Filter

DBB8664



Water Absorbing Filter

DBB0248

ACCESSORIES



Blanking Cap

DFF1005

Service Indicator

P174396

