



Donaldson Part No: **P923075**


Fluid Compatibility: Ethanol-free fluids and lubricants

The Thermally Reactive Advanced Protection (T.R.A.P.) Breather cartridge protects the fluids in your storage tanks from airborne particulate contamination and ambient moisture.

It combines a high capacity 3 micron air filter with a deliquescent breather that regenerates itself when air is expelled from the tank. This self-regenerating moisture blocking capability of T.R.A.P. enables extended life and functionality.

SPECIFICATIONS

Height	220 mm
O.D.	165mm
Efficiency	97% efficient @ 3 micron
Maximum Flow Range	500 lpm
Operating Temperature	-40 to 93°C
Connection:	1 ¼" BSP

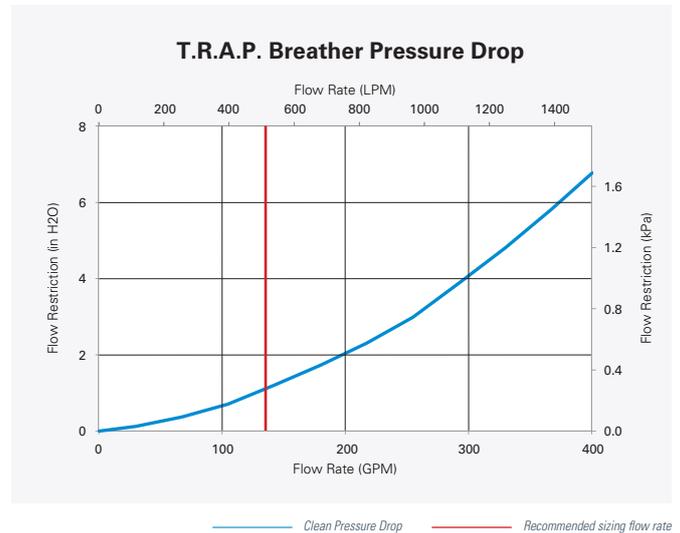

APPLICATIONS

- For use with all diesel fuels and lubricants
- Above and below ground tanks
- Mobile service trucks
- Indoor and outdoor applications
- High flow and large capacity tanks (may require multiple breather units)
- Establish the safe working pressure and vacuum valves of your tank before calculating breather requirements
- Replacement cartridge for DFF0078 assembly