

CLEAN FUEL & LUBRICANT SOLUTIONS

SINGLE PASS FILTRATION TARGETING AN ISO CLEANLINESS CODE OF 16/14/13

Donaldson Part No: **DBB8665**

Fluid Compatibility: Transmission and hydraulic oil

Micron rating and efficiency: 7 micron Beta 2000




Donaldson DBB8665 provides the targeted ISO cleanliness level of 16/14/13 for the duration of its service life and has been designed to suit most hydraulic and transmission oil applications.

Donaldson spin-on elements enable fast, simple and clean servicing, without the requirement of specialised tooling, lifting devices or elevated work platforms. The filter media has greater protection from environmental contamination during service and installation than common cartridge style elements, further enhancing Donaldson's high initial efficiency.

Contaminant loaded media is disposed of with the replaceable can, eliminating the need for manual cleaning of fixed infrastructure or direct handling of concentrated contaminants.

SPECIFICATIONS

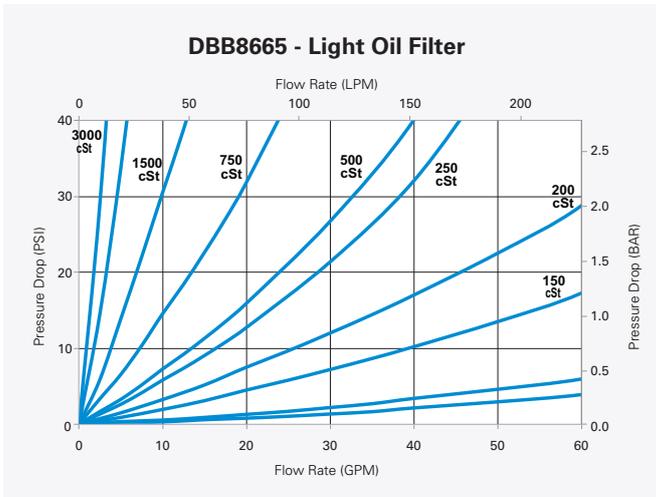

Outer Dimension	117 mm
Length	362 mm
Working Pressure	350 psi / 2413 kPa / 24.1 bar
Maximum Flow Range	246 lpm
Operating Temperature	-40 to 88°C
Media capacity reached at	50 psi dP
Dry Weight	2.3 kg
Liquid Capacity	3.8 L
Media	Proprietary synthetic
Seal Type	Viton
Internal Liner	E-coated
Potting Compounds	Epoxy

DESIGNED FOR USE WITH



CFLS Single Filter Heads
P570329, P570330



CFLS Dual Filter Heads
P568583, P574958



CFLS Manifolds
P561880, P568932, P568933, DFF1012

